


MULTIDRILL XL 170



ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

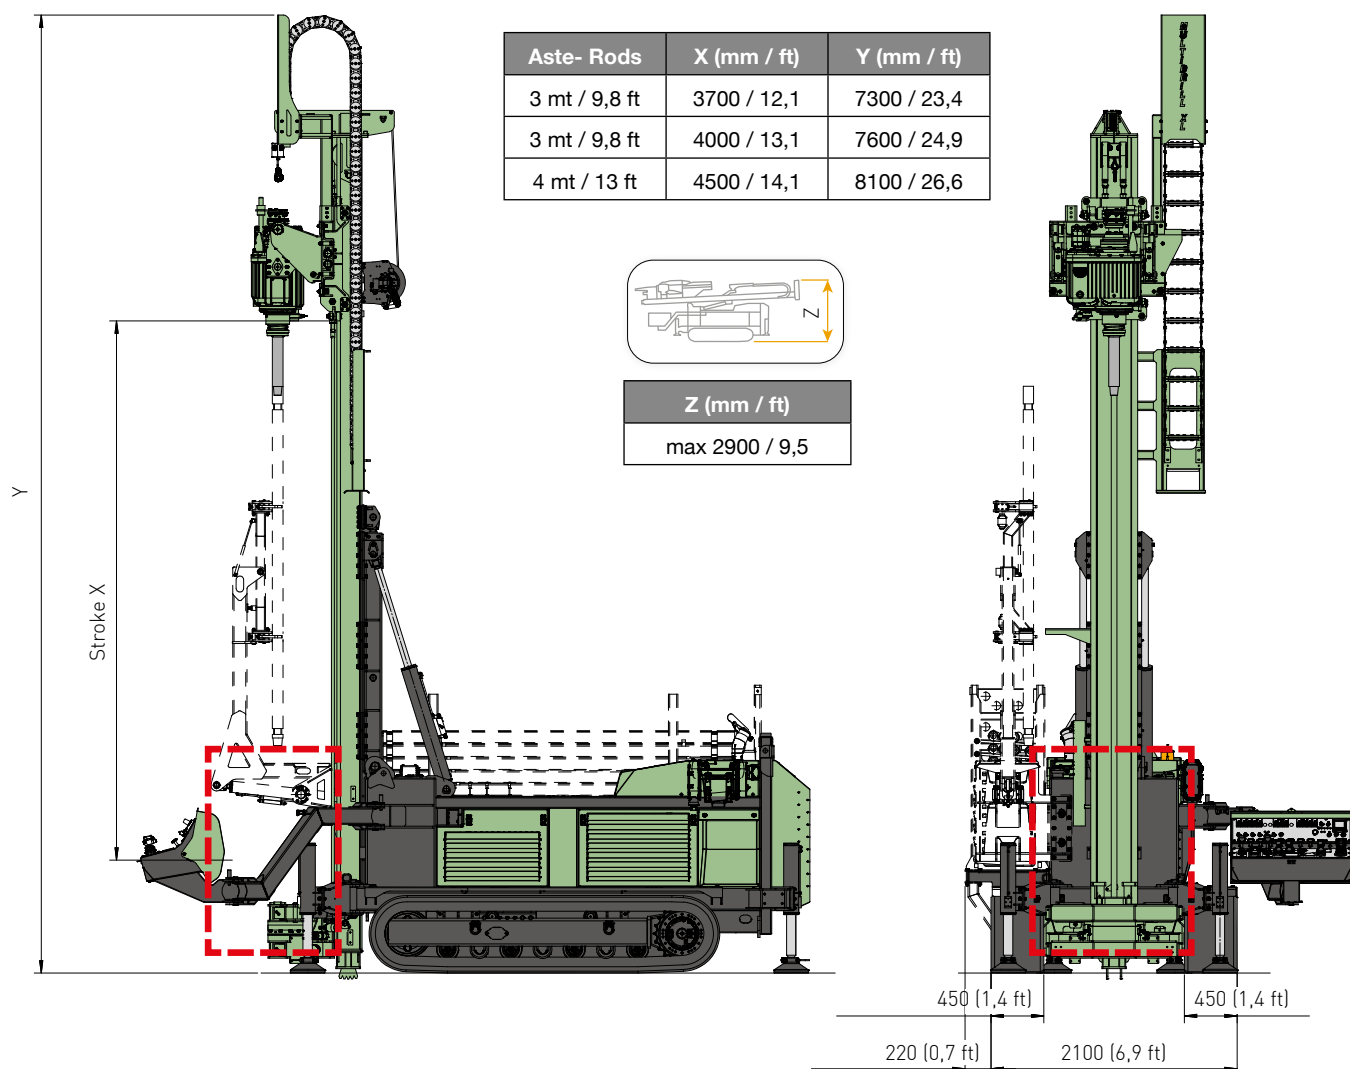

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C4.4 - Stage V - Tier 4 - 129,4 Kw (173,5 Hp) CAT C7.1 - Stage IIIA - Tier 3 - 129 Kw (173 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	3700-4000-4500 mm (12-13-14,8 ft)
Tiro	Pull-up	12000-14000-18000 daN (26977-31473-40465 lbf)
Spinta	Pull-down	6800-8000-13000 daN (15287-17984-29225 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	1860 daNm (13718 ft lbf)
Velocità max.	Max. speed	1000 rpm
MORSA	CLAMP	
Diametro	Diameter	60-355 mm (2,3"- 14")
PESO	WEIGHT	
		~12000 Kg (~26455 lb)

XL 170

**Powerful, Versatile
and Productive**



XL 170

Powerful, Versatile and Productive



ACCESSORI - ACCESSORIES

Verricello	Main Winch	3600 daN - 35 mt/min - (8093 lbf - 115 ft/min)
Verricello wire line	Wire line winch	1000 daN - 100 mt/min - (2248 lbf - 328 ft/min))
Pompa Triplex	Triplex Pump	200 lt/min - 70 bar - (53 gpm - 1015 psi)
Pompa monovite	Screw pump	600 lt/min - 12 bar - (159 gpm - 174 psi)
Pompa schiuma	Foam pump	80 lt/min - 40 bar - (21 gpm - 580 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
SPT idraulico	Hydraulic SPT device	760 mm - 63,5 daN (30" - 142 lbf)
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

