


# MULTIDRILL XL 275



**ITALIAN** DRILLING RIGS  
MANUFACTURERS SINCE 1964



## Dimensions

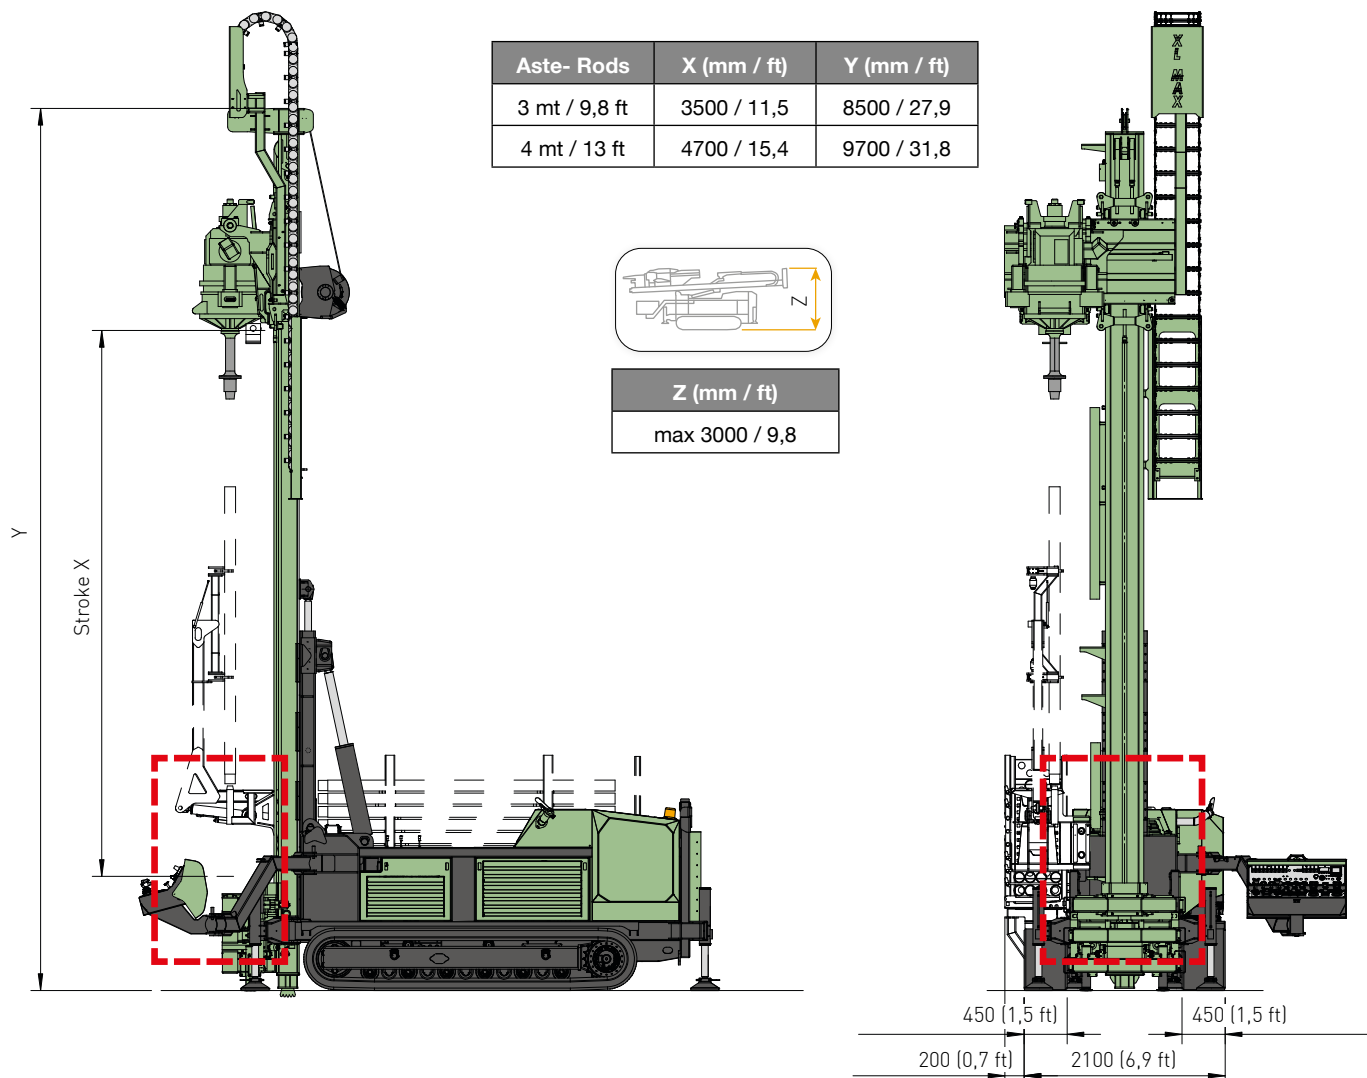

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	<b>CAT C7.1 - Stage V - Tier 4 - 205 Kw (275 Hp)</b> <b>CAT C7.1 - Stage IIIA - Tier 3 - 205 Kw (275 Hp)</b>
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	<b>3500-4700 mm (11,5-15,4 ft)</b>
Tiro	Pull-up	<b>12000 daN (26977 lbf)</b>
Spinta	Pull-down	<b>6800 daN (15287 lbf)</b>
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	<b>1800 daNm (13276 ft lbf)</b>
Velocità max.	Max. speed	<b>1250 rpm</b>
MORSA	CLAMP	
Diametro	Diameter	<b>60-355 mm (2,4"- 14")</b>
PESO	WEIGHT	<b>~16000 - 19000 Kg (~32000 - 38000 lb)</b>



# XL 275

Powerful, Versatile  
and Productive





# XL 275

Powerful, Versatile and Productive



## ACCESSORI - ACCESSORIES

Verricello	Main Winch	3600 daN - 55 mt/min - (8093 lbf - 164 ft/min)
Verricello wire line	Wire line winch	1000 daN - 100 mt/min - (2248 lbf - 328 ft/min))
Pompa Triplex	Triplex Pump	200 lt/min - 70 bar - (53 gpm - 1015 psi)
Pompa monovite	Screw pump	900 lt/min - 14 bar - (159 gpm - 174 psi)
Pompa schiuma	Foam pump	80 lt/min - 40 bar - (21 gpm - 580 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
SPT idraulico	Hydraulic SPT device	760 mm - 63,5 daN (30" - 142 lbf)
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

