


MULTIDRILL ML MAX



ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

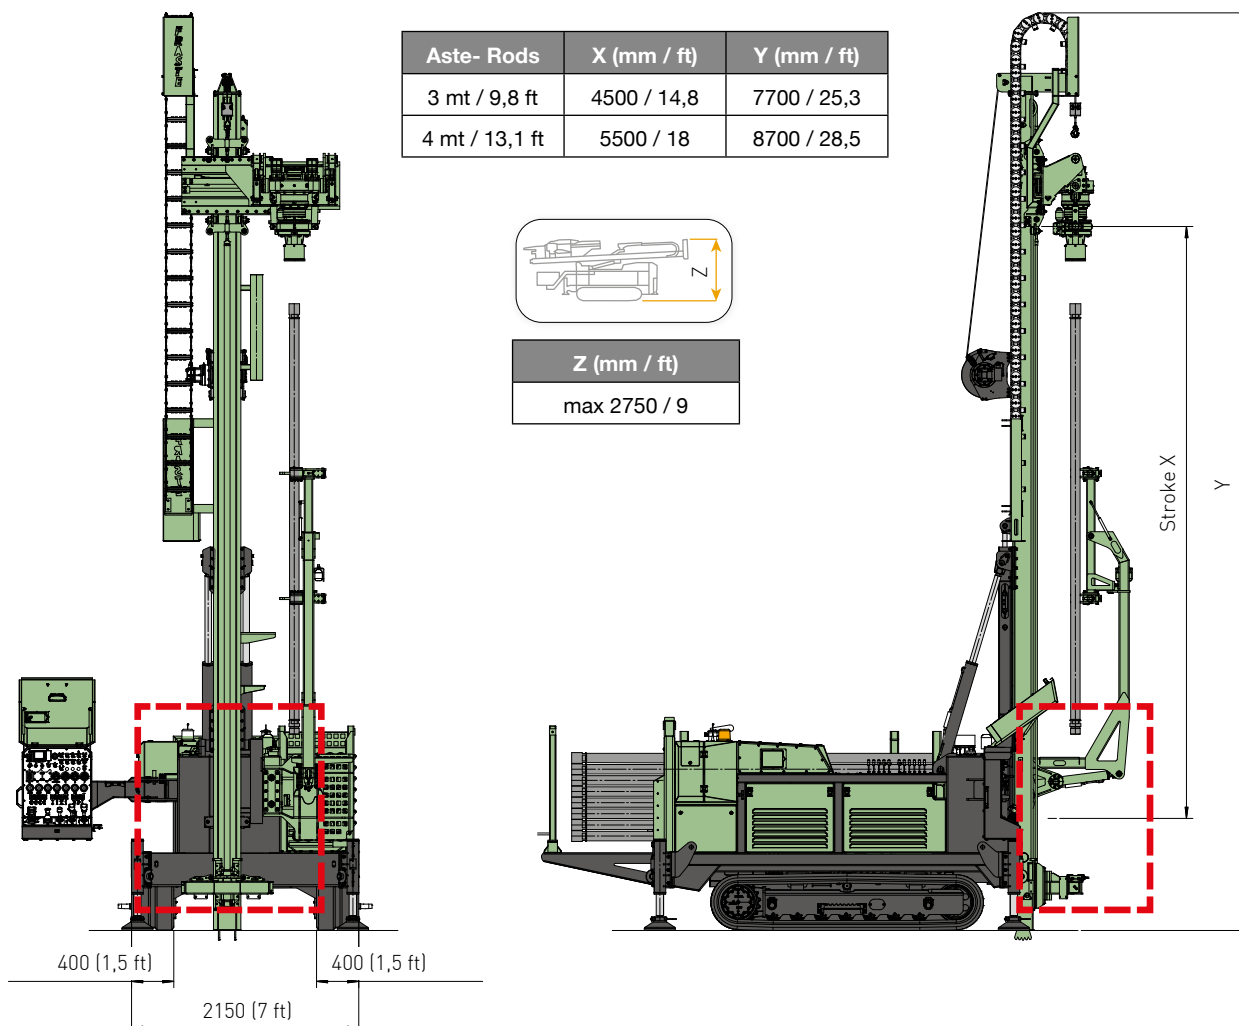


I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C4.4 - Stage IIIA - Tier 3 - 106 Kw (142 Hp) CAT C4.4 - Stage V - Tier 4F - 110 Kw (148 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	4500-5500 mm (14,8-18 ft)
Tiro	Pull-up	6000 daN (13488 lbf)
Spinta	Pull-down	4800 daN (10790 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	1180 daNm (8703 ft lbf)
Velocità max.	Max. speed	220 rpm
MORSA	CLAMP	
Diametro	Diameter	60-280 mm (2,4"- 11")
PESO	WEIGHT	~8650-9000 Kg (~19069-19481 lb)

ML MAX

Flexible,
Powerful.

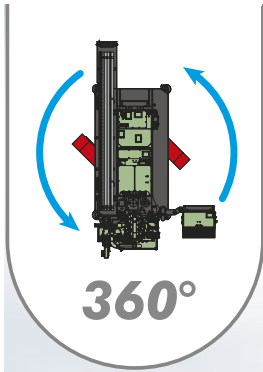

ML MAX

Flexible, Powerful.



ACCESSORI - ACCESSORIES

Verricello	Main Winch	2000 daN - 55 mt/min - (4496 lbf - 180 ft/min)
Pompa centrifuga	Centrifugal Pump	2000 lt/min - 8 bar - (528 gpm - 116 psi)
Pompa monovite	Screw pump	900 lt/min - 14 bar - (238 gpm - 203 psi)
Pompa schiuma	Foam pump	34 lt/min - 38 bar - (9 gpm - 550 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

