


MULTIDRILL SL



ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

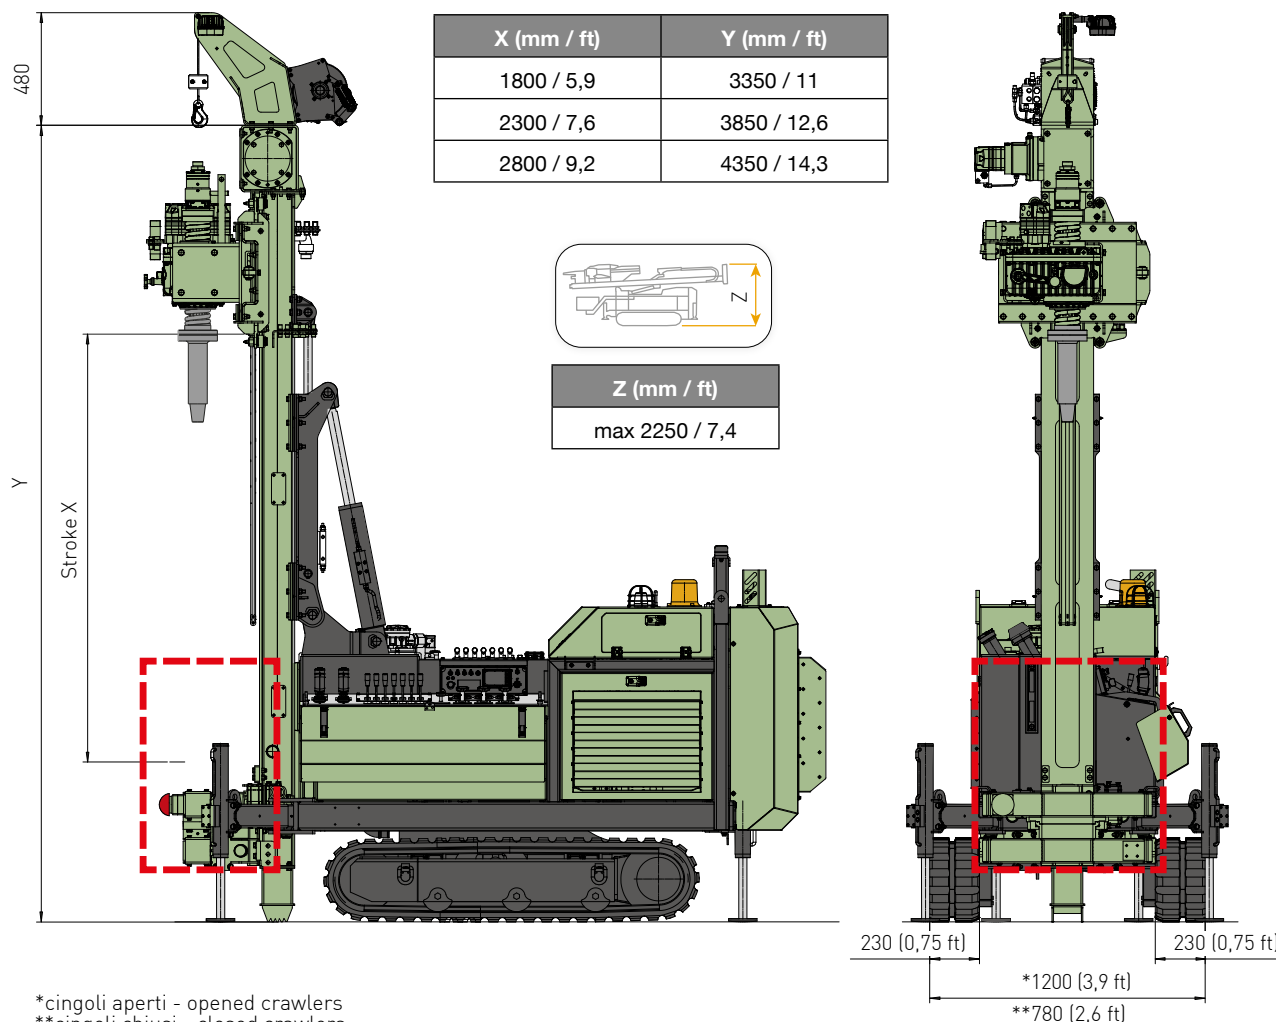

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C1.7 - Stage V - Tier 4 F - 36 Kw (48 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	1800-2300-2800 mm (5,9-7,6-9,2 ft)
Tiro	Pull-up	2500 daN (5620 lbf)
Spinta	Pull-down	2500 daN (5620 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	470 daNm (3466 ft lbf)
Velocità max.	Max. speed	900 rpm
MORSA	CLAMP	
Diametro	Diameter	48-210 mm (1,9"-8,3")
PESO	WEIGHT	~2500 Kg (~5511 lbf)



MULTIDRILL **SL**

Innovation, Hi-tech, Freshness.



ACCESSORI - ACCESSORIES

Verricello	Main Winch	1000 daN 34 mt/min - (2248 lbf - 111 ft/min)
Pompa Duplex	Duplex pump	34 lt/min - 38 bar - (9 gpm - 550 psi)
Pompa Quadruplex	Quadruplex pump	80 lt/min - 40 bar - (21 gpm - 580 psi)
Pompa monovite	Screw pump	500 lt/min - 8 bar - (132 gpm - 116 psi)
Pompa schiuma	Foam pump	34 lt/min - 38 bar - (9 gpm - 550 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
SPT idraulico	Hydraulic SPT device	760 mm - 63,5 daN - (30" - 142 lbf)

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

