


MULTIDRILL XL 140 T




ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964




Dimensions

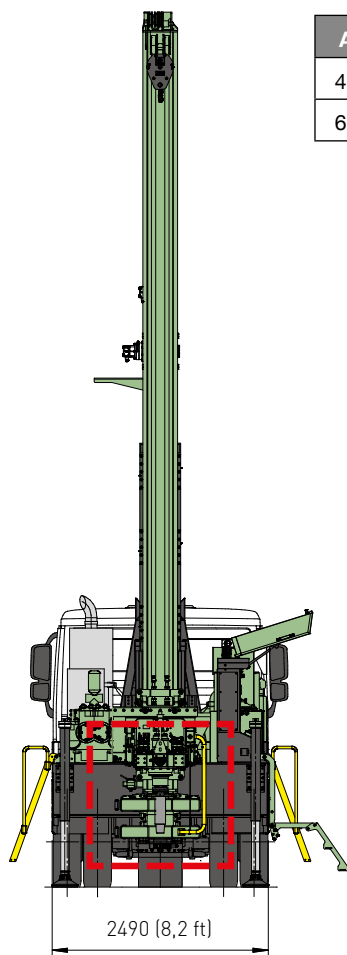

Aste- Rods	X (mm / ft)	Y (mm / ft)
4 mt / 13,1 ft	4500 / 14,8	7400 / 24,2
6 mt / 19,7 ft	5500 / 18	8400 / 27,5



Z (mm / ft)
max 4000 / 13,1

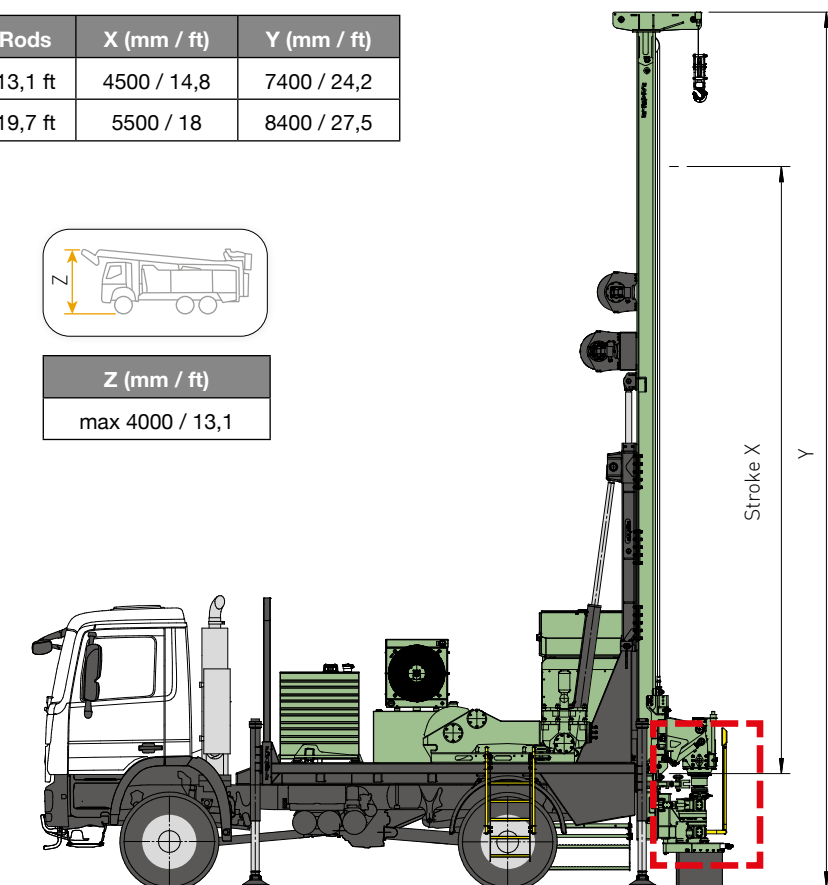

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C4.4 - Stage IIIA - Tier 3 - 106 Kw (142 Hp) CAT C4.4 - Stage V - Tier 4F - 110 Kw (148 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	4500 - 5500 mm (14,8 - 18 ft)
Tiro	Pull-up	10000 daN (22480 lbf)
Spinta	Pull-down	6800 daN (15287 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	1800 daNm (13276 ft lbf)
Velocità max.	Max. speed	1250 rpm
MORSA	CLAMP	
Diametro	Diameter	60-355 mm (2,3"- 14")
CAPACITÀ DI PERFORAZIONE	RATED DRILLING DEPTH CAPACITY	**250 mt (820 ft)

** Capacità ragionevolmente prevista, calcolata sui pesi teorici e reali dell'asta di perforazione ed esperienze sul campo. Sulla base del foro verticale, dritto e pulito, nonché alle perfette condizioni degli utensili e alla tecnica di foratura appropriata.**

**Capacity reasonably expected calculated on theoretical and actual drill pipe weights and field experiences. Based on vertical, straight and clean down hole as well as perfect tools conditions and appropriate drilling technique. **

XL 140 T

*Innovation,
Productivity.*



Rated drilling
depth capacity

250 mt*



XL 140 T

Innovation, Productivity.



ACCESSORI - ACCESSORIES

Verricello	Main Winch	3600 daN - 35 mt/min (8093 lbf - 115 ft/min)
Verricello wire line	Wire line winch	1000 daN - 100 mt/min (2248 lbf - 328 ft/min)
Pompa Triplex	Triplex pump	160 lt/min - 70 bar (43 gpm - 1015 psi)
Pompa monovite	Screw pump	900 lt/min - 14 bar (159 gpm - 174 psi)
Pompa schiuma	Foam pump	34 lt/min -38 bar (9 gpm - 550 psi)
Pompa G.D. 5x6	G.D. 5x6 Mud pump	760 lt/min - 21 bar (201 gpm - 305 psi)
Lubrificatore di linea	Line lubricator	8,5 l/min (2,25 gpm)
Valvola idraulica aria	Hydraulic air valve	-
SPT idraulico	Hydraulic SPT device	760 mm - 63,5 daN (30" - 142 lbf)
Radiocomando*	Remote radio control*	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

