


MULTIDRILL XL 140 W



ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

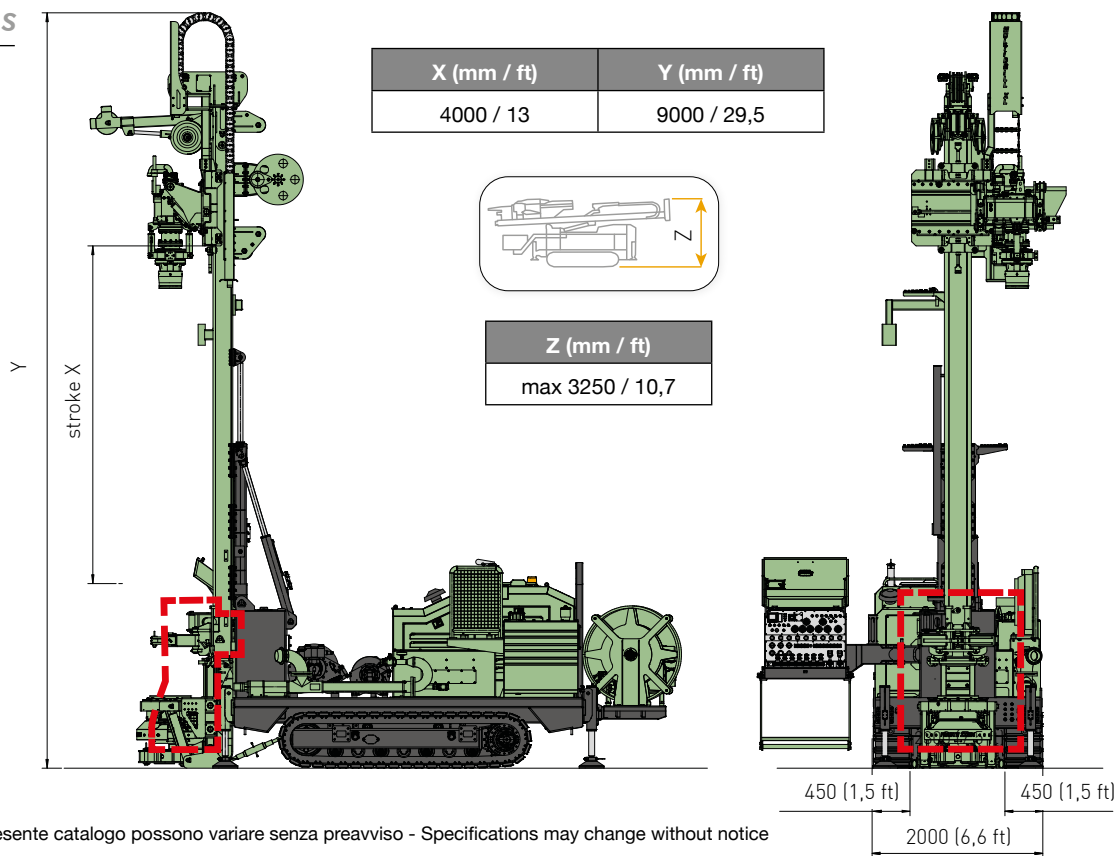

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C4.4 - Stage V - Tier 4F - 110 Kw (148 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	4000 mm (13 ft)
Tiro	Pull-up	10000 daN (22480 lbf)
Spinta	Pull-down	6800 daN (15287 lbf)
TESTA ROTANTE	ROTARY HEAD	
Coppia max.	Max. torque	1450 daNm (10694 ft lbf)
Velocità max.	Max. speed	805 rpm
MORSA	CLAMP	
Diametro	Diameter	60-280 mm (2,3"-11") - 60-355 mm (2,3"-14")
TAVOLA PER TUBI DI RIVESTIMENTO	CASING PIPES ROTARY TABLE	
Diametro di presa	Gripping diameter	up to 324 mm (1,06 ft)
Forza di chiusura	Clamping force	12500 daN (28101 lbf)
Coppia Max.	Max. torque	2000 daN (4496 lbf)
Tiro	Pull-up	18000 daN (40465 lbf)
Spinta	Pull-down	12000 daN (26977 lbf)
Velocità	Speed	14 rpm
Corsa	Stroke	400 mm (1,31 ft)
PESO	WEIGHT	~15500 Kg (~34171 lbf)

XL 140 W



XL 140 W

Compact, Flexible, Powerful.



ACCESSORI - ACCESSORIES

Verricello	Main Winch	10000 daN 40 mt/min - (22480 lbf - 131 ft/min)
Verricello wire line	Wire line winch	1000 daN 200 mt/min - (2248 lbf - 656 ft/min)
Pompa monovite	Screw pump	215 lt/min - 30 bar - (56 gpm - 435 psi)
Compressore	Air Compressor	8500 lt/min - 15 bar (2245 gpm - 217 psi)
Avvolgitubitubi aria	Air hose reel	-
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

