


MULTIDRILL XL 170 DR



ITALIAN DRILLING RIGS
MANUFACTURERS SINCE 1964



Dimensions

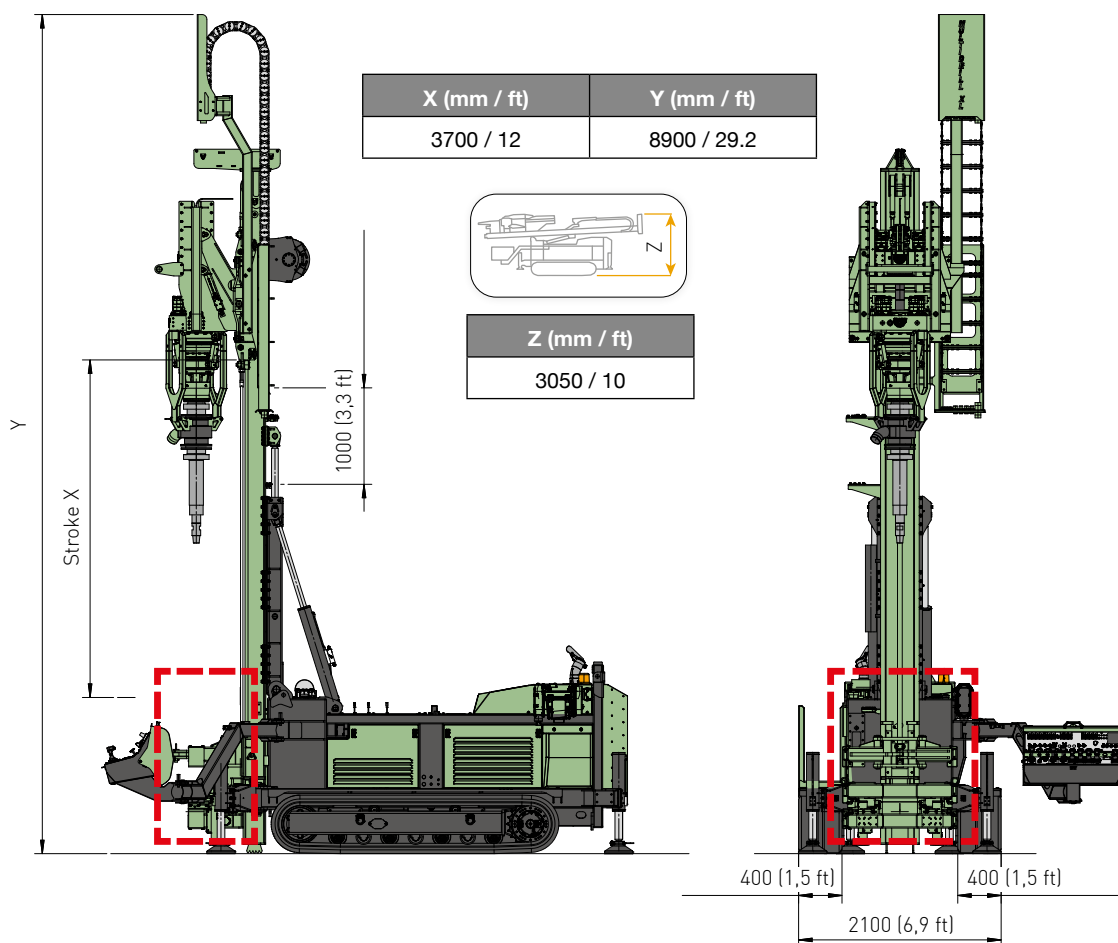

I dati esposti sul presente catalogo possono variare senza preavviso - Specifications may change without notice

MOTORE DIESEL	DIESEL ENGINE	
Potenza	Power	CAT C4.4 - Stage V - Tier 4 F - 129,4 Kw (173,5 Hp) CAT C7.1 - Stage IIIA - Tier 3 - 129 Kw (173 Hp)
ANTENNA	MAST	
Corsa testa di rotazione	Rotary head stroke	3700 mm (12,1 ft)
Tiro	Pull-up	12000-14000-18000 daN (26977-31473-40465 lbf)
Spinta	Pull-down	6800-8000-13000 daN (15287-17984-29225 lbf)
TESTA ROTANTE PER ASTE	ROTARY HEAD FOR DRILL PIPES	
Coppia max.	Max. torque	1180 daNm (8703 ft lbf)
Velocità max.	Max. speed	160 rpm
TESTA ROTANTE PER TUBO DI RIVESTIMENTO	ROTARY HEAD FOR CASING	
Coppia max.	Max. torque	2700 daNm (19914 ft lbf)
Velocità max.	Max. speed	70 rpm
MORSA	CLAMP	
Diametro	Diameter	60-350 mm (2,3"-13,8")
PESO	WEIGHT	~12780 Kg (~28175 lbf)

XL 170 DR

Double Head,
Double Power.



XL 170 DR

Double Head, Double Power.



ACCESSORI - ACCESSORIES

Verricello	Main Winch	3600 daN - 35 mt/min - (8093 lbf - 115 ft/min)
Verricello wire line	Wire line winch	1000 daN - 100 mt/min - (2248 lbf - 328 ft/min)
Pompa Triplex	Triplex pump	200 lt/min - 70 bar - (53 gpm - 1015 psi)
Pompa monovite	Screw pump	900 lt/min - 14 bar - (159 gpm - 174 psi)
Pompa schiuma	Foam pump	80 lt/min - 40 bar - (21 gpm - 580 psi)
Lubrificatore di linea	Line lubricator	8,5 lt/min (2,25 gpm)
Radiocomando	Remote radio control	-

ALTRI OPTIONAL DISPONIBILI A RICHIESTA - OTHER OPTIONALS ARE AVAILABLE ON REQUEST

